

Techno-Commercial Offer

16/01/2026
BIJ-323/P/1.2

To,

RAVINDRA KADE
Consumer No:
Recommended System Capacity: 15 KW
Location: Koradi Nagpur

BIJLEE SOLAR

Made On Solar Ladder.

About Bijlee Solar

Bijlee Solar has emerged as one of the well-established cleantech ventures focussed on the execution of Solar PV projects with specialisation in Advance Module level Power electronics. The company was founded by individuals with over 30 years of experience in mining & mineral industry with a mission to help make a transition to solar energy in a hassle-free manner. We offer in-house end-to-end services for a customized solar powered plant assisting our clients at every step – Site Audit, Evaluation, Design & Engineering, Global Procurement, Installation, Commissioning, Operations & Maintenance of Solar Plants built to perform at optimum efficiency levels throughout their project life.

Key Affiliations

Ministry of New and Renewable Energy
Government of India

MEDA महाऊर्जा

CRISIL

RESERVE BANK OF INDIA

MAHAVITARAN

MAHAGENCO
Maharashtra State Power Generation Co. Ltd.

Our prestigious clients

ITC

NLU

Haldiram's
NAGPUR
TASTE OF TRADITION

CHITNAVIS CENTRE
FOR CULTURE AND HUMAN RESOURCE DEVELOPMENT

ASIAN KIDNEY HOSPITAL & MEDICAL CENTRE

redearth
TADOBA

MODERN SCHOOL
NAGPUR

KETAN HYUNDAI

Made On
Solar Ladder.

Our Expertise

8+	1000+	100+	30 MW+
Year of Experience	Residential Projects	Commercial Projects	Installed Capacity



RBI
120kW, Nagpur



Panchpoli Gurudwara
50kW



MNLU, Nagpur
804 KW



Chitanvis Centre
51 kW, Nagpur



Modern School
44 kW, Nagpur



Mankapur Stadium
160 kW, Nagpur



Vanamati
145 kW, Nagpur



Size: 236 kW, Canal Top



Koradi Mandir,
1.168MW



Entica Heights Apartment
50 kW, Nagpur



NMC Bus stop
257 kW, Nagpur



Dr Babasaheb Ambedkar International Convention Centre,50 kW, Nagpur

Made On Solar Ladder.

Site
Survey Details

Project Location: **KORADI**

MSEDCL division :

Additional load increase required:

Structural Design proposed:

Load Bearing Capacity of roof:


Client Name:

Contracted Demand: **15 KW**

Orientation of proposed structure:

Shading Analysis:

Grid Connection (1ph or 3PH):

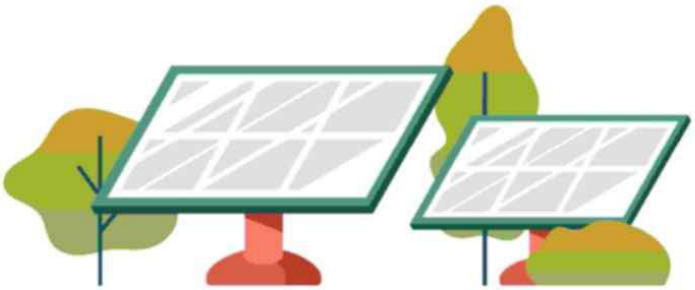

For A Brighter Future

Additional electrical updated required or requested:

Site Accessibility (available or need to be created):

Internet available on terrace: **NA**

Cleaning System considered:

Ladder access for elevated structure:


Existing earthing available:



Made On Solar Ladder.

Products and Systems Description

Solar PV Module

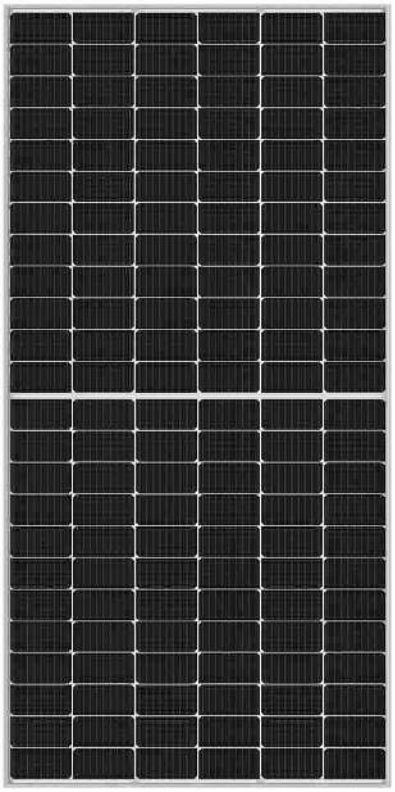

Panel Brand :	Novasys/ Navitas Green Solutions
Cell Type :	144 Cut- Mono Perc Non-DCR
Weight :	25 Kgs
Efficiency :	20.3%
Dimension :	2334 x 1211 x 30
Number of Modules:	26
Area Per Panel :	2.01/m2
Watt Peak :	590
Warranty:	10/25 Years

SOLAR INVERTER



Inverter Brand :	Growatt/ Sungrow
Output (AC):	Max - 15000 W
Number of Inverters:	1
Efficiency :	97.8%
Inverter Weight:	27 kgs
Dimension:	625 x 510 x 225
Warranty:	5 Years

Made On Solar Ladder.

Products and Systems Description

Cable

Cable Brands: **Polycab**

Warranty

Panel Performance: **25 Year(s)**

Inverter: **10 Year(s)**

Balance Of System: **1 Year(s)**

Balance of System

MC4 Connector: **Staubli**

MCCB: **ABB**

LT Switch Gear: **L&T**

ACDB: **Reputed**

Lugs: **3D**

Lightning Arrestor: **Excell**

Earthing: **Excell**

RMS: **In built**

DCDB: **Reputed**

Ballast: **-**

Structure

Structure Sub Type: **Elevated Residential Option - 2 mtr**

Windspeed: **150kmh**

Material: **GI Structure**


Tilt Angle: **15 Degree**

Length: **As per site conditions**

Lower End Height: **up to 3 meters**

Width: **As per site conditions**

Higher End Height: **up to 4 meters**

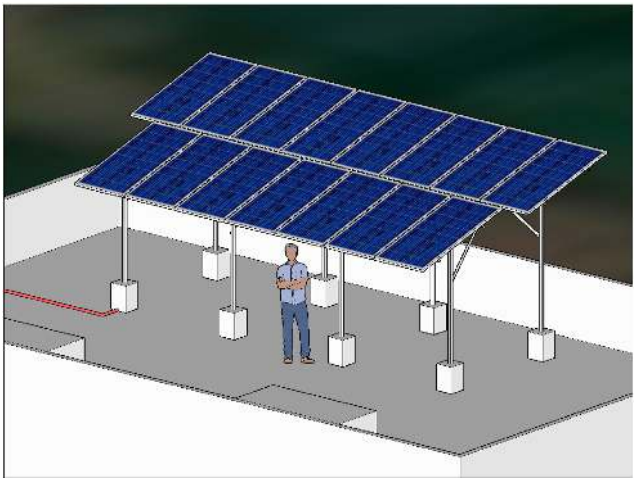

Made On Solar Ladder.

Techno Commercial Offer 15 KW


Particular	Quantity	Price per KW	Total (Rs.)
Cost of Standard 15 KW Solar PV Power Project : Design, Engineering, Procuring, supplying, Installation and commissioning, Solar PV modules, Inverter, Electrical distribution system & Balance of system	15 KW	₹ 38,000	₹ 5,70,000
Galvanised Steel structure, erection & civil work as per Design shared	15 KW	₹ 0	₹ 0
GROSS COST OF PROJECT EXCLUDING GST		₹ 38,000	₹ 5,70,000 + GST
NET COST			
COST OF SOLAR PV SYSTEM			₹ 5,70,000
GST @ 8.9 %			₹ 50,730
TOTAL PROJECT COST		₹ 41,382	**₹ 6,20,730**

Made On Solar Ladder.

Solar Savings

Payback Period	Average Yearly Generation	Average Annual Savings
2.5 Years	18750 Units	₹ 2,53,125

Project Cost	Trees Saved	Co2 Reduction
₹ 6,20,730	498	19 Tonnes

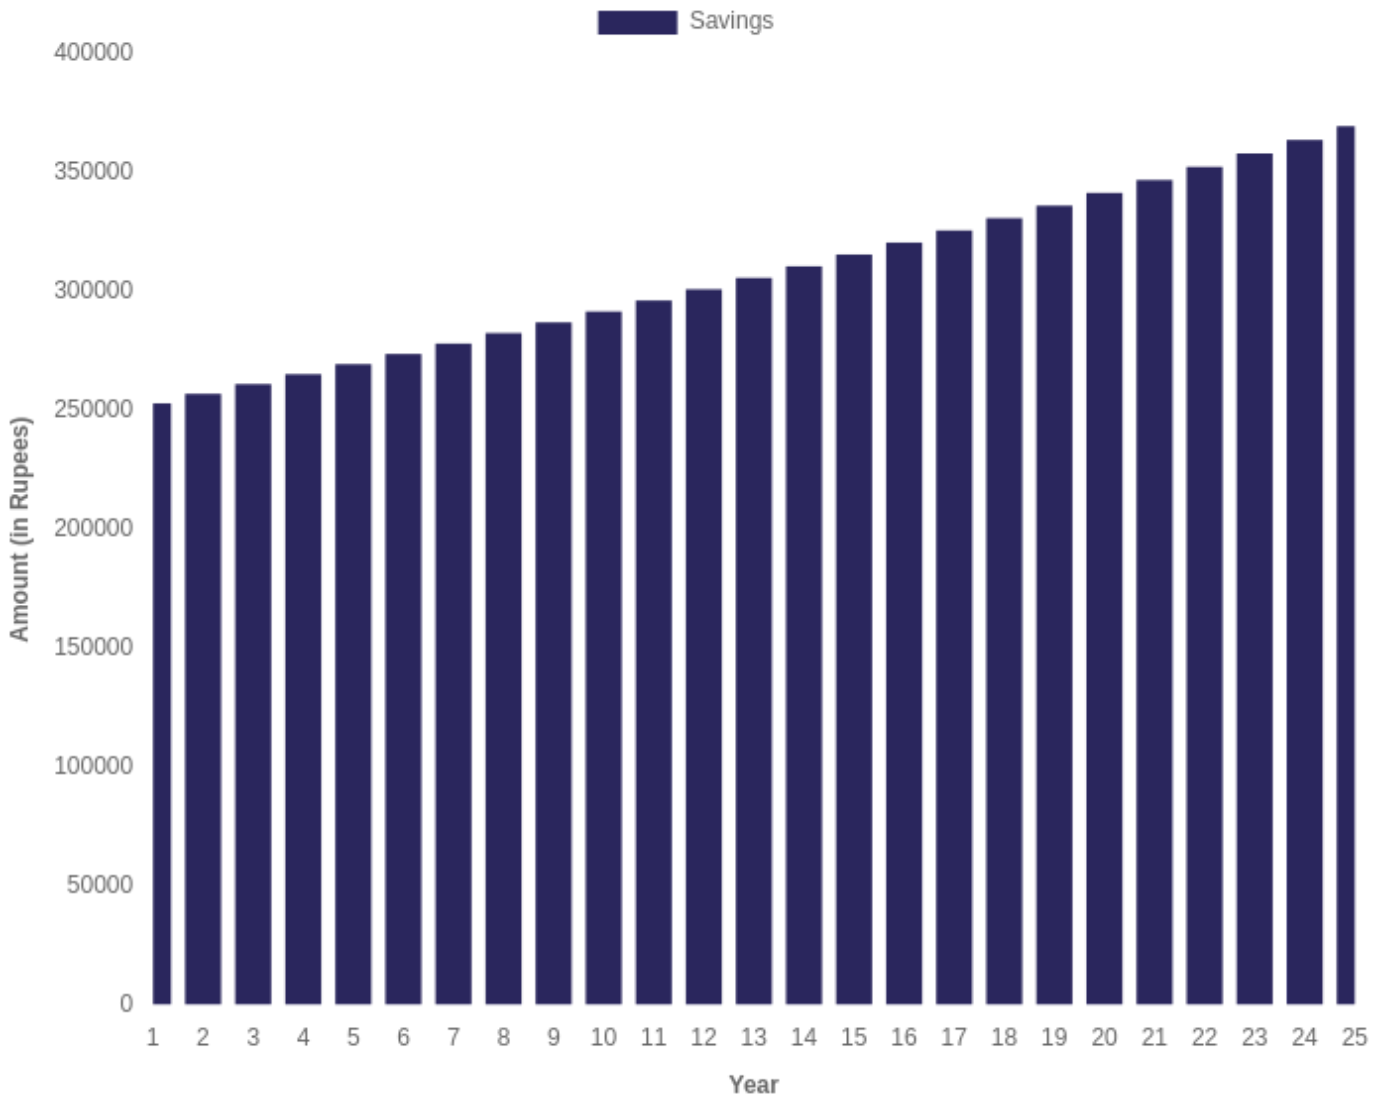

Made On Solar Ladder.

Scope of Work

A	SUPPLY (FOR AT SITE)	
B.1	Solar PV Modules: Mono perc 540 Wp and above (TIER-1)	Yes
B.2	Module Mounting Structure – Galvanized with Civil work	Yes
B.3	MC4 compatible connectors for creating blocks of strings	Yes
B.4	DC cables from each string (Modules) to Inverter	Yes
B.5	AC distribution box with SPD	Yes
B.6	AC cable supply and laying from ACDB to Main LT room	Yes
B.7	Smart On grid- Inverter	Yes
B.8	DC distribution box with SPD	Yes
B.9	AC LT Panel for Multiple Inverter's with SPD	Yes
B.10	Inverter Canopy near shed area	Yes
B.11	Earthing system for both AC and DC side inclusive of mounting structures	Yes
B.12	Lightning protection for the entire solar plant	Yes
B.13	Communication cables	Yes
B.15	Net Metering arrangement & permissions as per MPERC guidelines	Yes
B.16	Balance of system as per the BOM approved by you	Yes
B.17	Application of Subsidy in MNRE portal	Yes
B.18	Pre - commissioning checks of DC & AC System	Yes
B.19	Pre - commissioning checks of Distribution panel and LT cable	Yes
B.20	Safety Testing of the Solar Pv plant before Commissioning	Yes
B.21	Installation and Termination of the AC cable in the Main Panel	Yes
B.22	Commissioning of the Grid connected Plant	Yes
B.23	Synchronization to grid with Online monitoring Setup	Yes
B	STATUTORY REQUIREMENTS // DOCUMENTATION AND HANDOVER	
B.1	Drawing Approval	Yes
B.2	Insurance for the Plant for 3 years as per agreement	Yes
B.3	Port handling, customs clearance excluding free issue items (if applicable)	Yes
B.4	Drawing Approval for CT, PT and Metering	Yes
B.5	Test certificates and type test certificates	Yes
B.6	Detailed Engineering drawings and documents	Yes
B.7	Documents including: · All the approvals · Test reports · Pre-commissioning check reports · FAT· As built Drawings and documents and catalogues of equipment · O & M required for Net metering and Subsidy process manual	Yes

Made On Solar Ladder.

Special Value Additions

We believe a solar power plant is an investment that will be passed on to generations ahead. With keeping that in mind we design our systems that are built to last, with the best technological options and unique rooftop structures, we will tailor the plan best t for you. Going with Bijlee Solar gives you the following value additions:

1) High-quality systems with the Best pricing
2) 1 year free CMC
3) Turnkey solution with no hidden cost
4) Post-sales service setup for low system downtime

Terms And Conditions

GENERAL TERMS & CONDITIONS

1. PRICE

The price offered should be read in conjunction with the following commercial terms and conditions. The prices are inclusive of duties, taxes, chess and other levies. However, in case there is statutory rate, variation or introduction of new duties, taxes, cess and other levies or any difference in interpretation, by the competent authorities, such levies will be extra and the same will be reimbursed by you at actual.

2. INSURANCE AND RISK IN TRANSIT

Insurance up to Erection & Commissioning is to our account. Thereafter customer will take necessary, insurance coverage for all risks

3. PACKING & TRANSPORTATION

Packing and Transportation will be covered by us

Made On Solar Ladder.

Project Timeline



Payment Schedule

A) 60% advance for PV module & Inverter booking.
B) 20% after receipt of Material.
C) 10% of after completion of the work.
D) 10% of after Installation of Net Meter.

Payment Details

- Bank Transfer or Cheque in favor of
- GST NO : 24ABASR0045E1ZJ
- Bank Details:
  Name: Bijlee led Lighting Pvt ltd
  A/c no. 04650500000580
  Bank: BANK OF BARODA
  Branch: West High Court Road, Dharampeth, Nagpur - 440010
  IFS Code: BARB0DHARAM

Made On Solar Ladder.

CONTACT US

ADDRESS

A/1 Indira Sagar
apartment R.N.T Road
Civil Lines, Nagpur,
Maharashtra

Mon-Saturday 10AM to
7PM Weekends Closed

Contact No.

9322619031

E-MAIL


bijleesolar@gmail.com

WEBSITE

bijleesolar.com

"365 Days of 2022 with Bijlee Solar"



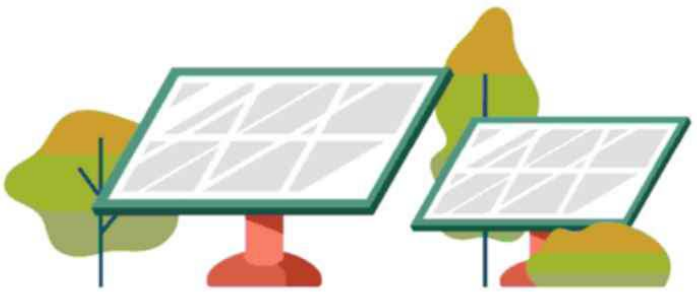

For A Brighter Future

Made On
Solar Ladder.